

FIG 1


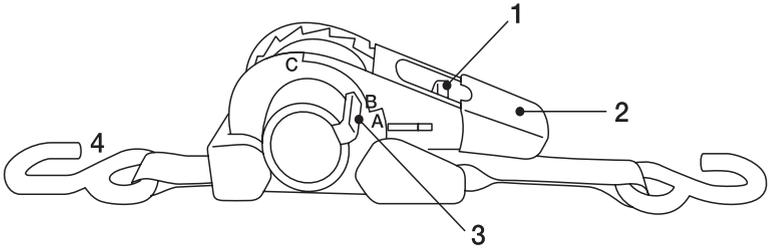


FIG 2

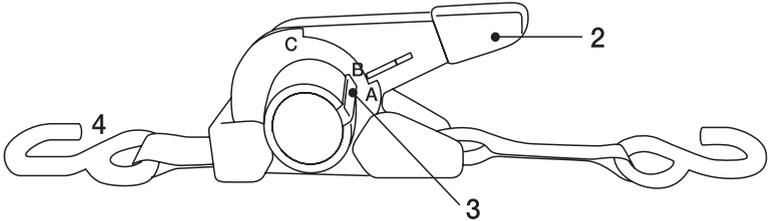

### Retractable Tie Down Strap

WLL/BS: 320/640daN

Length: 3.6M

Webbing Material: PES

#### Do not use for lifting!

#### Important:

- Inspect straps before use.  
Do not use straps that are
- frayed, cut, damaged or have damaged ratchet.
- Do not expose to temperatures higher than 90°C.  
Do not exceed the maximum capacity as mentioned
- by the maker.
- Do not tighten the strap over sharp edges.

Incorrect use of the tie down strap may cause serious damage to the product, personal property and/or personal injury.

#### Instructions for use

To fasten:

- Press button 1, and push handle 2 in position A (fig.1).
- Pull belt 4 at desired length and fasten both hooks (fig.1).
- Push handle 2 from position B to C to tighten the strap, and leave handle 2 in position B (fig.2).

To release:

- Press button 1 and push handle 2 in position A (fig.1).
- Press button 3 and the belt retracts automatically.

**CAUTION: while retraction, hold the belt/hook with the other hand to prevent injuries.**