



UNIVERSAL PLATE CLAMP

SPECIFICATION FOR 0.75 TONNE TO 5 TONNE

AS/NZS
4991

Certified

WLL From
0.75-5t

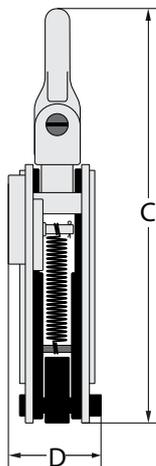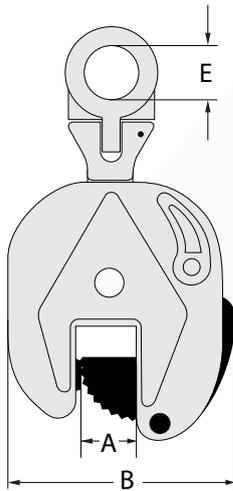

Universal Plate Clamp

The Austlift Universal Plate Clamp is designed for a wide range of uses for vertical lifting and is particularly suited for lifting and turning of steel plates of up to 180°. This clamp can be applied to a wide range of applications such as ship sections and the extraction of pile sheets which maintains a structure for safety against ground touching shocks of the loads.

This clamp is fitted with a hinged hoisting eye to allow movement in all directions. This clamp is fitted with a safety lock device by which the lock will not disengage even if the lifting sling has been slackened, this guarantees the clamp will not disengage in both open as well as closed positions.

- Suited to steel surface hardness of up to 37 RC.
- Individually serial numbered with test certificates and user manual.

Application

- High strength and durable
- Identification tag with serial number
- Proof tested to 2 x WLL with certificate
- Minimum Safety factor of 5:1
- Spare parts are available

Features

- High strength and durable
- Identification tag with serial number
- Proof tested to 2 x WLL with certificate
- Minimum Safety factor of 5:1
- Spare parts are available

WLL (T)	CODE	Wt. (kg)	DIMENSION (mm)				
			A	B	C	D	E
0.75	142075	2	0-15	105	218	51	ø30
1.5	142150	7.4	0-20	170	370	70	ø60
2	142200	7.8	0-25	175	375	72	ø60
3	142300	16	0-30	195	418	98	ø60
5	142500	23	0-50	230	480	110	ø80

AUSTLIFT Lifting your business to a higher level.

NSW Head Office

43 Frank Street
 Wetherill Park, NSW 2164
 02 9757 2277

WA Office

42 Mulgal Road
 Malaga, WA 6090
 08 9248 6674

QLD Office

7 Durbell Street
 Acacia Ridge, QLD 4110
 07 3272 0777

VIC Office

475 Dohertys Road
 Truganina, VIC 3029
 03 9314 5525